

MM 1...ZM

ICON PLAN

MiniMELF case for surface mount insertion. The
operating voltages are in accordance with the international E 24
standard. Smaller packages are available for lower and higher Zener
voltages are upon request.

Diodes are also available in DO-35 case with the type
designation BZX55C.

Maximum Ratings (Ta)





ELECTRO

Subsidiary of Sino-Tech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724



Dated : 20/09/2005

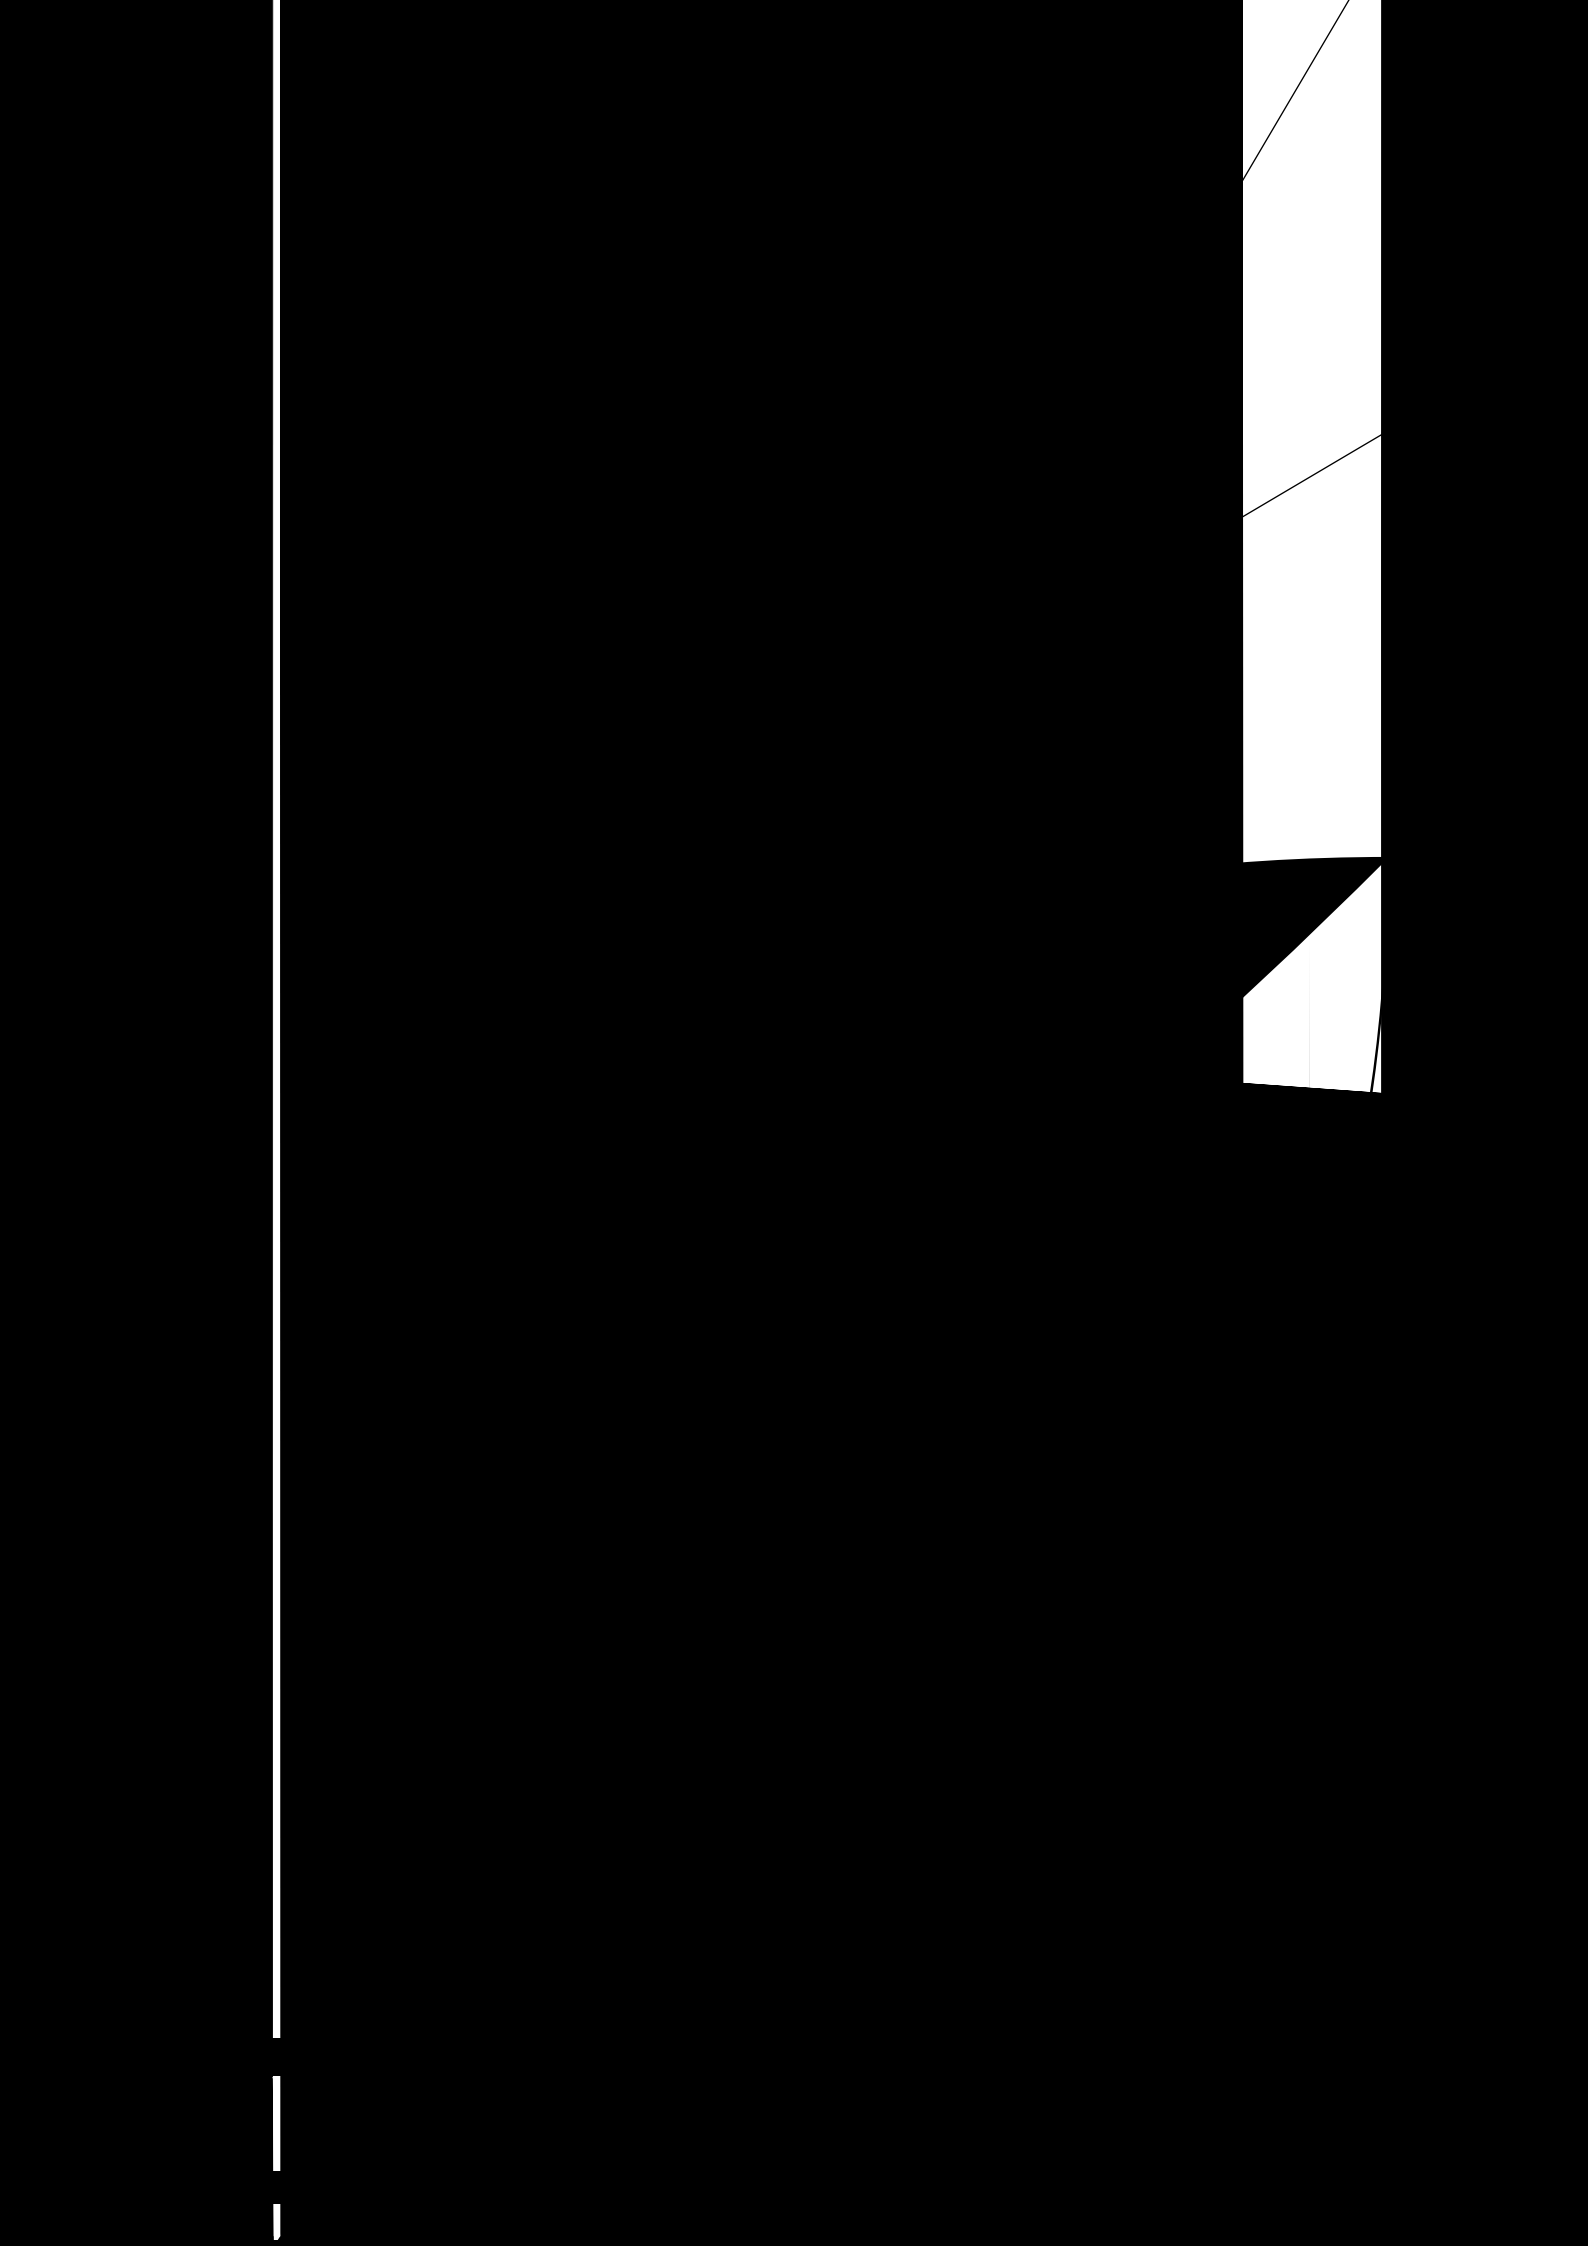

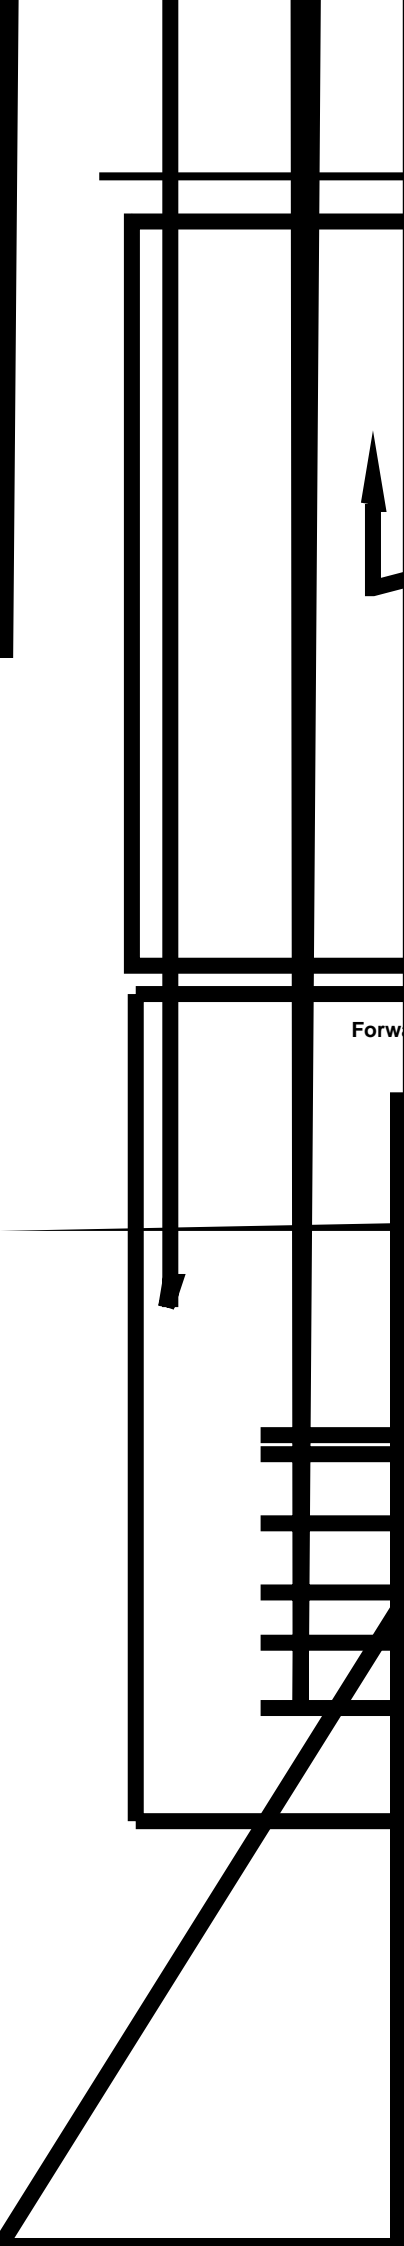

Change of Zener voltage from turn-on
to the point of thermal equilibrium
Zener voltage

$Z = r_{zth} \cdot I_Z$

5 mA

ZMM...

