

Y L U à

R

!	6	Đ	Đ	Đ
Đ		.	.	.

%	ø
2š	€RÉ
GE	
y	



TRX 特锐祥
专 注 电 容 器 11 年

www.trxc.net

Add scEØ4

Add szØE4

Tel! +86-816-61670387/+86-755-27892117

Fax! +86-816-6167076/+86-755-27893019

1 Ü

91 Ö

503



ø ĩ. G ŷ

© Ü

Ø

Ø

š ò



AK

(

Ü

Ü

ŷ

*Ö

Y

»

Y

Q

Ÿ

•

Q

W

2Š

Œ

y



TRX 特锐祥

专注电容器 11年

www.trxc.net

Add scE

Add sz

Tel! +86-816-61670387/+86-755-27892117

Fax! +86-816-6167076/+86-755-27893019

1 Ü

91 Ö

503



ø ñ. G ý

© Ů

Ø

Ø

š ò

6

6

6

6

6

6

6

6

6



ø ĩ. G ħ

© Ů

Ø


Ů

š ò

6\

Y1 F 222 M 064 X 280 A
 Class Dielectric Capacitance Tolerance Dielectric diameter Leads spacing Leads length Lead Type

⌘

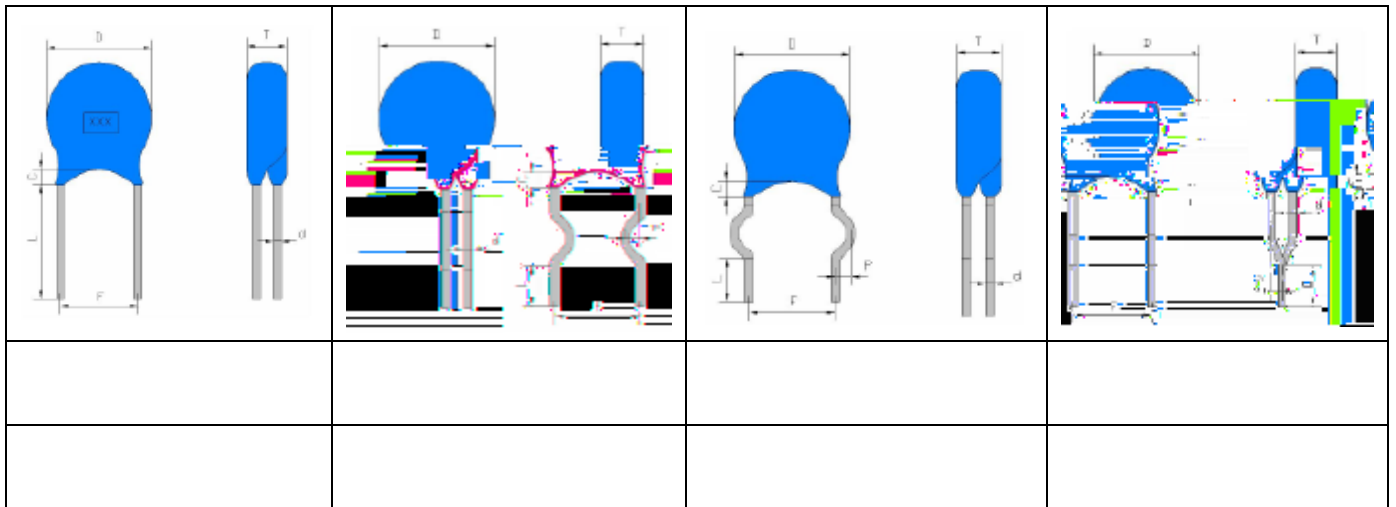

①

②

③

④

⑤

1024.5

cec

1.5

	ø ñ. G ʘ		
	© Û		Ø
	Ø		š ò

--	--	--

	ø ñ. G ý		
	© Û		Ø
	Ø		š ò

--	--	--	--



TRX 特锐祥

专 注 电 容 器 11 年

ø ħ.

G ŷ

© Ů


Ø

Ů

š ò

$$R = \frac{220 \cdot 10^{-6}}{C_R} \Omega$$

© Ü		Ø	
Ø		š ò	

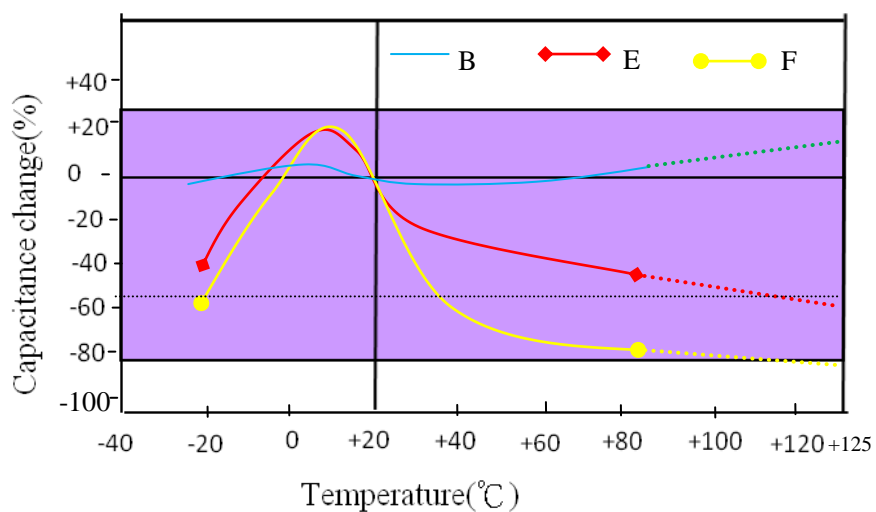



TRX 特锐祥

专 注 电 容 器 11 年

ø ĩ.

G ŷ


© Ů

Ø

Ů

š ò

w¹



CA

è





TRX 特锐祥

专 注 电 容 器 11 年

ø ħ.

G ŷ

© Ů

Ø

Ů

š ò





TRX 特锐祥

专 注 电 容 器 11 年

ø ħ.

G ŷ

© Ů

Ø

Ů

š ò

ŷ

ò